


trol gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	198	range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,442 0,404
Parameters for directional light sources:				
Peak luminous intensity (cd)		1 001	Beam angle in degrees, or the range of beam angles that can be set	95
Parameters for LED and OLED light sources:				
R9 colour rendering index value		7	Survival factor	1,00
the lumen maintenance factor		1,00		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)		0,72	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,0

(a): : not applicable;

(b): : not applicable;

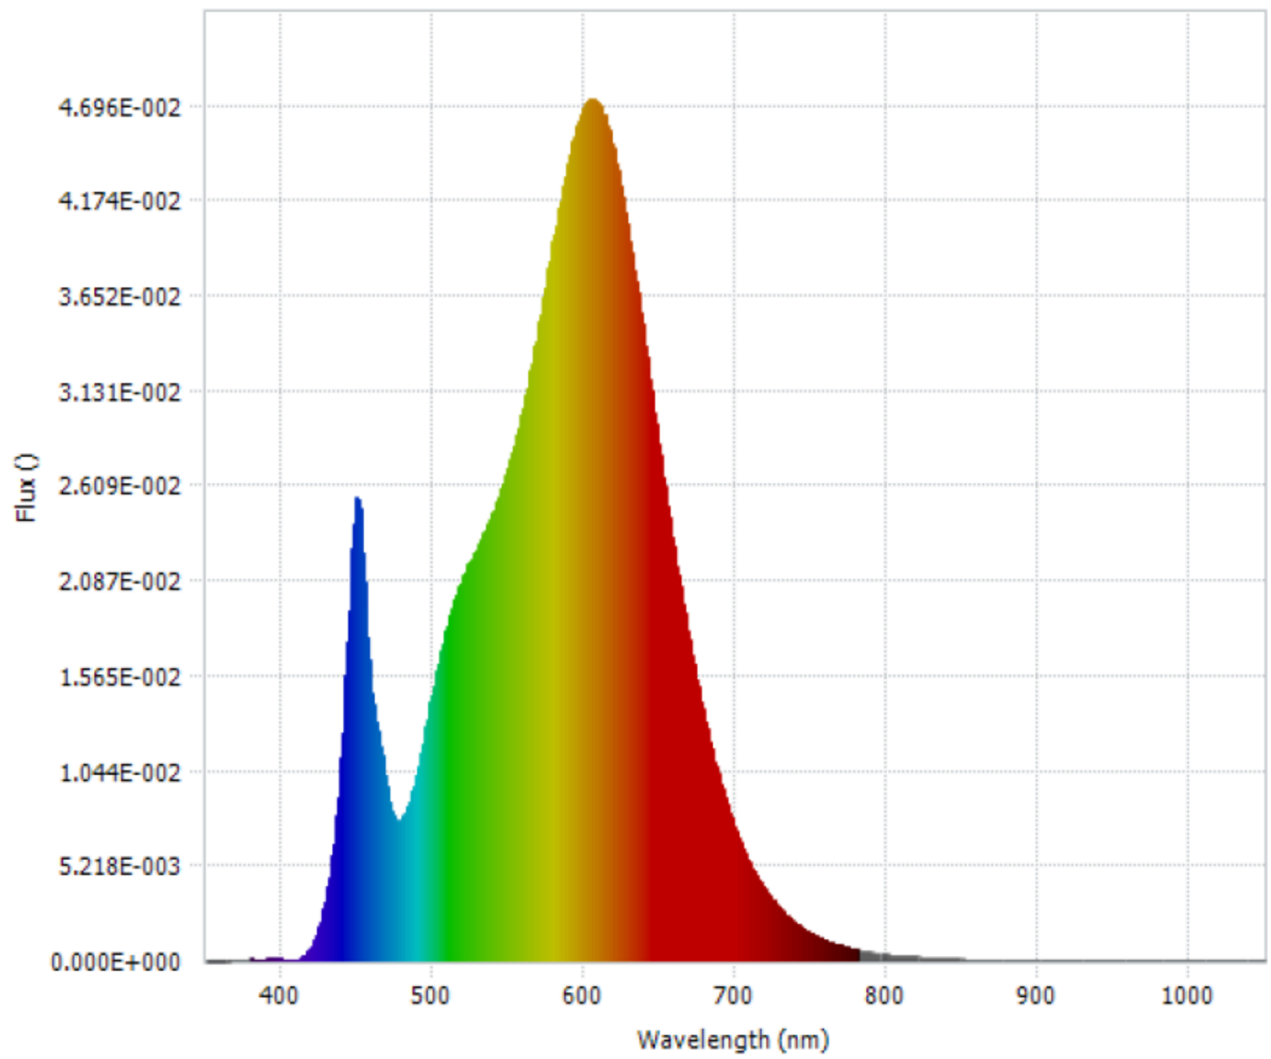

Model placed on the Union market from 31/03/2021.



EPREL registration number: 2507587

<https://eprel.ec.europa.eu/qr/2507587>

Supplier: Amazon EU S.à r.l. (Importer)

Website: amazon.com

Customer care service:

Name: Amazon_Compliance Contact

Website: www.amazon.com

Email: device-certification@amazon.com

Phone: +1 650-426-1100

Address:

Av. John F. Kennedy 38 1855 Luxembourg Luxembourg